

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Networking

Don Porter
(portions courtesy Vyas Sekar)

1

1

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Logical Diagram

2

2

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Networking (2 parts)

- Goals:
 - Review networking basics
 - Discuss APIs
 - Trace how a packet gets from the network device to the application (and back)
 - Understand Receive livelock and NAPI

3

3

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

4 to 7 layer diagram

(from Understanding Linux Network Internals)

Figure 13-1. OSI and TCP/IP models

4

4

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Nomenclature

- Frame: hardware
- Packet: IP
- Segment: TCP/UDP
- Message: Application

5

5

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

TCP/IP Reality

- The OSI model is great for undergrad courses
- TCP/IP (or UDP) is what the majority of programs use
 - Some random things (like networked disks) just use ethernet + some custom protocols

6

6

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Ethernet (or 802.2 or 802.3)

- All slight variations on a theme (3 different standards)
- Simple packet layout:
 - Header: Type, source MAC address, destination MAC address, length, (and a few other fields)
 - Data block (payload)
 - Checksum
- Higher-level protocols “nested” inside payload
- “Unreliable” – no guarantee a packet will be delivered

7

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Ethernet History

- Originally designed for a shared wire (e.g., coax cable)
- Each device listens to all traffic
 - Hardware filters out traffic intended for other hosts
 - I.e., different destination MAC address
 - Can be put in “promiscuous” mode, and record everything (called a network sniffer)
- Sending: Device hardware automatically detects if another device is sending at same time
 - Random back-off and retry

8

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Early competition


- Token-ring network: Devices passed a “token” around
 - Device with the token could send; all others listened
 - Like the “talking stick” in a kindergarten class
- Send latencies increased proportionally to the number of hosts on the network
 - Even if they weren’t sending anything (still have to pass the token)
- Ethernet has better latency under low contention and better throughput under high

9

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Token ring

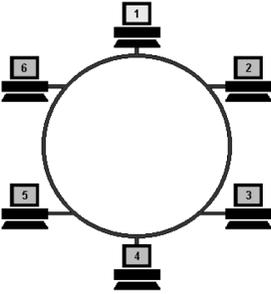


Source: <http://www.datacottage.com/nch/troperation.htm>

10

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Shared vs Switched

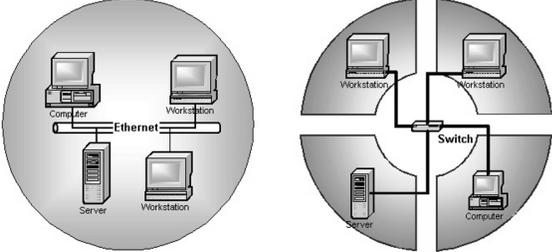

Shared Ethernet: 1 collision domain for multiple nodes. The possibility of collisions. Non-deterministic

Switched Full Duplex Ethernet: 1 collision domain per node. Use of switch. No possibility of collisions. Deterministic.

Source: http://www.industrialethernetu.com/courses/401_3.htm

11

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL

COMP 790: OS Implementation

Switched networks

- Modern ethernets are switched
- What is a hub vs. a switch?
 - Both are a box that links multiple computers together
 - Hubs broadcast to all plugged-in computers (let computers filter traffic)
 - Switches track who is plugged in, only send to expected recipient
 - Makes sniffing harder ☹

12

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL **COMP 790: OS Implementation**

Internet Protocol (IP)

- 2 flavors: Version 4 and 6
 - Version 4 widely used in practice—today’s focus
- Provides a network-wide unique device address (IP address)
- This layer is responsible for routing data across multiple ethernet networks on the internet
 - Ethernet packet specifies its payload is IP
 - At each router, payload is copied into a new point-to-point ethernet frame and sent along

13

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL **COMP 790: OS Implementation**

Transmission Control Protocol (TCP)

- Higher-level protocol that layers end-to-end reliability, transparent to applications
 - Lots of packet acknowledgement messages, sequence numbers, automatic retry, etc.
 - Pretty complicated
- Applications on a host are assigned a *port* number
 - A simple integer from 0-64k
 - Multiplexes many applications on one device
 - Ports below 1k reserved for privileged applications

14

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL **COMP 790: OS Implementation**

User Datagram Protocol (UDP)

- The simple alternative to TCP
 - None of the frills (no reliability guarantees)
- Same port abstraction (1-64k)
 - But different ports
 - I.e., TCP port 22 isn’t the same port as UDP port 22

15

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL **COMP 790: OS Implementation**

Some well-known ports

- 80 – http
- 22 – ssh
- 53 – DNS
- 25 – SMTP

16

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL **COMP 790: OS Implementation**

Example

(from Understanding Linux Network Internals)

Figure 13-4. Headers compiled by layers: (a...d) on Host X as we travel down the stack; (e) on Router RT1

17

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL **COMP 790: OS Implementation**

Networking APIs

- Programmers rarely create ethernet frames
- Most applications use the **socket** abstraction
 - Stream of messages or bytes between two applications
 - Applications still specify: protocol (TCP vs. UDP), remote host address
 - Whether reads should return a stream of bytes or distinct messages
- While many low-level details are abstracted, programmers must understand basics of low-level protocols

18

THE UNIVERSITY OF NORTH CAROLINA @ CHAPEL HILL COMP 790: OS Implementation

Sockets, cont.

- One application is the **server**, or **listens** on a pre-determined port for new connections
- The **client connects** to the server to create a message channel
- The server **accepts** the connection, and they begin exchanging messages

19

THE UNIVERSITY OF NORTH CAROLINA @ CHAPEL HILL COMP 790: OS Implementation

Creation APIs

- `int socket(domain, type, protocol)` – create a file handle representing the communication endpoint
 - Domain is usually AF_INET (IP4), many other choices
 - Type can be STREAM, DGRAM, RAW
 - Protocol – usually 0
- `int bind(fd, addr, addrlen)` – bind this socket to a specific port, specified by `addr`
 - Can be INADDR_ANY (don't care what port)

20

THE UNIVERSITY OF NORTH CAROLINA @ CHAPEL HILL COMP 790: OS Implementation

Server APIs

- `int listen(fd, backlog)` – Indicate you want incoming connections
 - Backlog is how many pending connections to buffer until dropped
- `int accept(fd, addr, len, flags)` – Blocks until you get a connection, returns where from in `addr`
 - Return value is a new file descriptor for child
 - If you don't like it, just close the new fd

21

THE UNIVERSITY OF NORTH CAROLINA @ CHAPEL HILL COMP 790: OS Implementation

Client APIs

- Both client and server create endpoints using `socket()`
 - Server uses `bind`, `listen`, `accept`
 - Client uses `connect(fd, addr, addrlen)` to connect to server
- Once a connection is established:
 - Both use `send/recv`
 - Pretty self-explanatory calls

22

THE UNIVERSITY OF NORTH CAROLINA @ CHAPEL HILL COMP 790: OS Implementation

Linux implementation

- Sockets implemented in the kernel
 - So are TCP, UDP and IP
- Benefits:
 - Application doesn't need to be scheduled for TCP ACKs, retransmit, etc.
 - Kernel trusted with correct delivery of packets
- A single system call (i386):
 - `sys_socketcall(call, args)`
 - Has a sub-table of calls, like `bind`, `connect`, etc.

23

THE UNIVERSITY OF NORTH CAROLINA @ CHAPEL HILL COMP 790: OS Implementation

Plumbing

- Each message is put in a `sk_buff` structure
- Between socket/application and device, the `sk_buff` is passed through a stack of protocol handlers
 - These handlers update internal bookkeeping, wrap payload in their headers, etc.
- At the bottom is the device itself, which sends/receives the packets

24

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL
COMP 790: OS Implementation

sk_buff

(from Understanding Linux Networking Internals)

The diagram shows a 'struct sk_buff' on the left with three pointers: 'head', 'data', and 'tail'. 'head' points to the start of the 'headroom' section. 'data' points to the start of the 'Data' section. 'tail' points to the end of the 'tailroom' section. The 'Data' section is located between the 'headroom' and 'tailroom' sections.

Figure 2-2. head/end versus data/tail pointers

25

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL
COMP 790: OS Implementation

Efficient packet processing

- Moving pointers is more efficient than removing headers
- Appending headers is more efficient than re-copy

26

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL
COMP 790: OS Implementation

Walk through how a rcvd packet is processed

The flowchart illustrates the path of a received packet through four layers: Application, Transport, Internet, and Link.

- Application:** Application reads from socket → socket reads from queue → We try to get it (we want?) → socket asks for payload → application gets data, continues.
- Transport:** TCP checks for errors → packet goes in socket queue → wait for socket read → TCP copies payload.
- Internet:** IP checks for errors → route to different host → (See IP Forwarding) → out to send queue → packet waits in queue.
- Link:** scheduler runs "bottom half" → net_bh pops packet queue → net_bh matches protocol (IP) → packet goes on to backlog queue → device checks, stores packet → packet arrives on medium.

 A legend indicates: Data (solid square), TCP Header (square with horizontal lines), IP Header (square with vertical lines), Ethernet Header (square with diagonal lines).

Source = http://www.cs.unh.edu/cnrg/people/gherrin/linux-net.html#tth_sEc6.2

27

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL
COMP 790: OS Implementation

Interrupt handler

- "Top half" responsible to:
 - Allocate a buffer (sk_buff)
 - Copy received data into the buffer
 - Initialize a few fields
 - Call "bottom half" handler
- In some cases, sk_buff can be pre-allocated, and network card can copy data in (DMA) before firing the interrupt
 - Lab 6a will follow this design

28

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL
COMP 790: OS Implementation

Quick review

- Why top and bottom halves?
 - To minimize time in an interrupt handler with other interrupts disabled
 - Gives kernel more scheduling flexibility
 - Simplifies service routines (defer complicated operations to a more general processing context)

29

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL
COMP 790: OS Implementation

Digression: Softirqs

- A hardware IRQ is the hardware interrupt line
 - Also used for hardware "top half"
- Soft IRQ is the associated software "interrupt" handler
 - Or, "bottom half"
- How are these implemented in Linux?
 - Two canonical ways: Softirq and Tasklet
 - More general than just networking

30

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Softirqs

- Kernel's view: per-CPU work lists
 - Tuples of <function, data>
- At the right time, call function(data)
 - Right time: Return from exceptions/interrupts/sys. calls
 - Also, each CPU has a kernel thread ksoftirqd_CPU# that processes pending requests
 - ksoftirqd is nice +19. What does that mean?
 - Lowest priority – only called when nothing else to do

31

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Softirqs, cont.

- Device programmer's view:
 - Only one instance of a softirq function will run on a CPU at a time
 - Doesn't need to be reentrant
 - **reentrant** if it can be interrupted in the middle of its execution and then safely called again ("re-entered") before its previous invocations complete execution
 - If interrupted, won't be called again by interrupt handler
 - Subsequent calls enqueued!
 - One instance can run on each CPU concurrently, though
 - Must use locks

32

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Tasklets

- For the faint of heart (and faint of locking prowess)
- Constrained to only run one at a time on any CPU
 - Useful for poorly synchronized device drivers
 - Say those that assume a single CPU in the 90's
 - Downside: If your driver uses tasklets, and you have multiple devices of the same type---the bottom halves of different devices execute serially

33

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Softirq priorities

- Actually, there are 6 queues per CPU; processed in priority order:
 - HI_SOFTIRQ (high/first)
 - TIMER
 - NET TX
 - NET RX
 - SCSI
 - TASKLET (low/last)

34

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Observation 1

- Devices can decide whether their bottom half is higher or lower priority than network traffic (HI or TASKLET)
 - Example: Video capture device may want to run its bottom half at HI, to ensure quality of service
 - Example: Printer may not care

35

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Observation 2

- Transmit traffic prioritized above receive. Why?
 - The ability to send packets may stem the tide of incoming packets
 - Obviously eliminates retransmit requests based on timeout
 - Can also send "back-off" messages

36

THE UNIVERSITY OF NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Receive bottom half

- For each pending sk_buff:
 - Pass a copy to any taps (sniffers)
 - Do any MAC-layer processing, like bridging
 - Pass a copy to the appropriate protocol handler (e.g., IP)
 - Recur on protocol handler until you get to a port
 - Perform some handling transparently (filtering, ACK, retry)
 - If good, deliver to associated socket
 - If bad, drop

37

THE UNIVERSITY OF NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Socket delivery

- Once the bottom half/protocol handler moves a payload into a socket:
 - Check and see if the task is blocked on input for this socket
 - If so, wake it up
- Read/recv system calls copy data into application

38

THE UNIVERSITY OF NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Socket sending

- Send/write system calls copy data into socket
 - Allocate sk_buff for data
 - Be sure to leave plenty of head and tail room!
- System call does protocol handling during application's timeslice
 - Note that receive handling done during ksoftirqd timeslice
- Last protocol handler enqueues a softirq to transmit

39

THE UNIVERSITY OF NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Transmission

- Softirq can go ahead and invoke low-level driver to do a send
- Interrupt usually signals completion
 - Interrupt handler just frees the sk_buff

40

THE UNIVERSITY OF NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Switching gears

- We've seen the path network data takes through the kernel in some detail
- Now, let's talk about how network drivers handle heavy loads

41

THE UNIVERSITY OF NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Our cup runneth over

- Suppose an interrupt fires every time a packet comes in
 - This takes N ms to process the interrupt
- What happens when packets arrive at a frequency approaching or exceeding N ?
 - You spend all of your time handling interrupts!
- Will the bottom halves for any of these packets get executed?
 - No. They are lower-priority than new packets


42

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL COMP 790: OS Implementation

Receive livelock

- The condition that the system never makes progress because it spends all of its time starting to process new packets
- Real problem: Hard to prioritize other work over interrupts
- Principle: Better to process one packet to completion than to run just the top half on a million

43

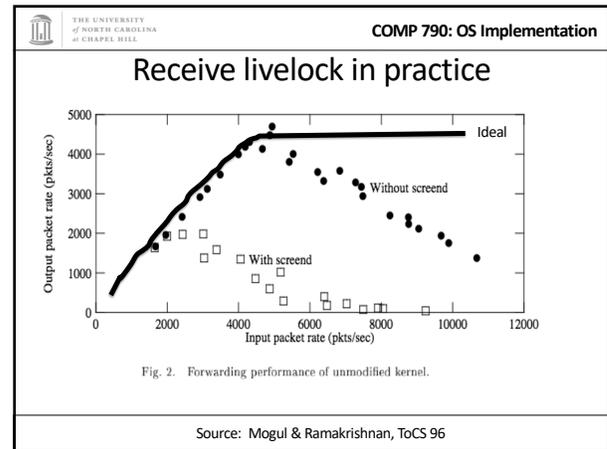

44

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL COMP 790: OS Implementation

Shedding load

- If you can't process all incoming packets, you must drop some
- Principle: If you are going to drop some packets, better do it early!
- If you quit taking packets off of the network card, the network card will drop packets once its buffers get full

45

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL COMP 790: OS Implementation

Idea

- Under heavy load, disable the network card's interrupts
- Use polling instead
 - Ask if there is more work once you've done the first batch
- This allows a packet to make it all the way through all of the bottom half processing, the application, and get a response back out
- Ensuring some progress! Yay!

46

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL COMP 790: OS Implementation

Why not poll all the time?

- If polling is so great, why even bother with interrupts?
- Latency: When incoming traffic is rare, we want high-priority, latency-sensitive applications to get their data ASAP


47

THE UNIVERSITY OF NORTH CAROLINA AT CHAPEL HILL COMP 790: OS Implementation

General insight

- If the expected input rate is low, interrupts are better
- When the expected input rate gets above a certain threshold, polling is better
- Just need to figure out a way to dynamically switch between the two methods...

48

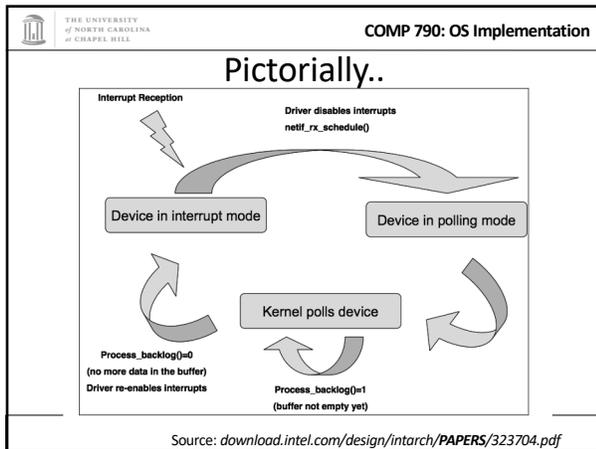

49

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Why haven't we seen this before?

- Why don't disks have this problem?
- Inherently rate limited
- If the CPU is bogged down processing previous disk requests, it can't issue more
- An external CPU can generate all sorts of network inputs

50

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

Linux NAPI

- Or New API. Seriously.
- Every driver provides a `poll()` method that does the low-level receive
 - Called in first step of `softirq` RX function
- Top half just schedules `poll()` to do the receive as `softirq`
 - Can disable the interrupt under heavy loads; use timer interrupt to schedule a poll
 - Bonus: Some rare NICs have a timer; can fire an interrupt periodically, only if something to say!

51

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

NAPI

- Gives kernel control to throttle network input
- Slow adoption – means some measure of driver rewriting
- Backwards compatibility solution:
 - Old top half still creates `sk_buffs` and puts them in a queue
 - Queue assigned to a fake "backlog" device
 - Backlog poll device is scheduled by NAPI `softirq`
 - Interrupts can still be disabled

52

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

NAPI Summary

- Too much input is a real problem
- NAPI lets kernel throttle interrupts until current packets processed
- `Softirq` priorities let some devices run their bottom halves before net TX/RX
 - Net TX handled before RX

53

THE UNIVERSITY of NORTH CAROLINA at CHAPEL HILL COMP 790: OS Implementation

General summary

- Networking basics and APIs
- Idea of plumbing from socket to driver
 - Through protocol handlers and `softirq` poll methods
- NAPI and input throttling

54