




# x86 Assembly Crash Course

---


Don Porter

# Registers

- ❖ Only variables available in assembly
- ❖ General Purpose Registers:
  - ❖ EAX, EBX, ECX, EDX (32 bit)
  - ❖ Can be addressed by 8 and 16 bit subsets

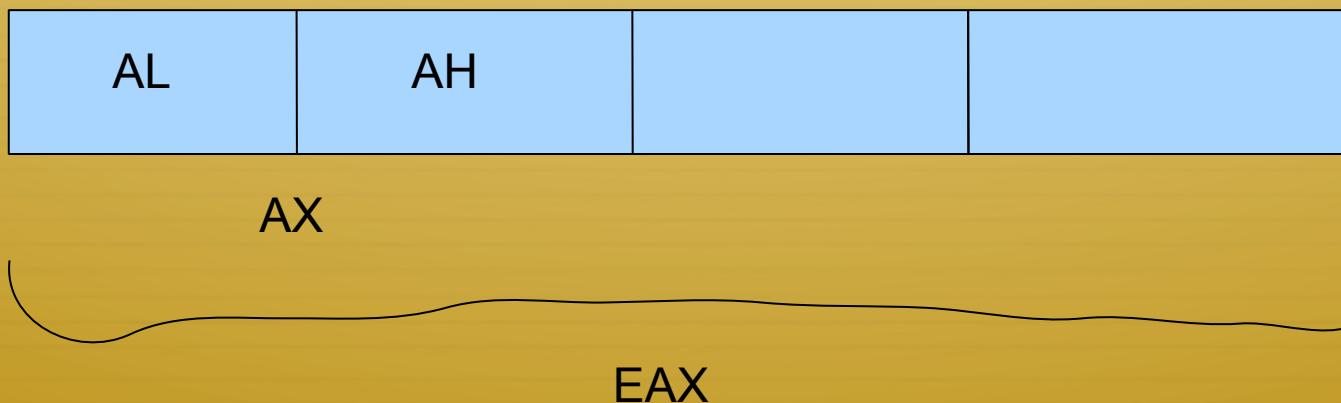

# Registers (cont.)



- ❖ Index and Pointer Registers
  - ❖ EBP – Stack Base
  - ❖ ESP – Stack “Top”
  - ❖ EIP – Instruction Pointer
  - ❖ ESI& EDI
- ❖ EFLAGS – holds processor state
  - ❖ Bitwise interpretation

# Basic Instruction Layout



- ❖ Opcode Dest, Src1, Src2
  - ❖ ADD %EAX, %EBX == EAX = EAX + EBX
- ❖ Operation Suffix indicates operand size:
  - ❖ l (long) = 32 bits
    - ❖ ex: addl %eax, %ebx
  - ❖ w (word) = 16 bits

# Basic Instructions


- ❖ Simple Instructions:
  - ❖ ADD, SUB, MUL, DIV
- ❖ Stack Manipulation - PUSH, POP
  - ❖ PUSHAL, POPAL – push/pop “big 7” registers at once
  - ❖ PUSHF, POPF - push/pop eflags register
- ❖ Call a function with CALL
- ❖ Return from a function with RET
- ❖ Copy a register value with MOV

# Addressing Memory




- ❖ Address stored in a register: (%eax)
- ❖ Address in register + offset: 4(%eax)
- ❖ C variable foo becomes: \_foo

# Next: Inline assembly




- ❖ But first, a bit of very helpful background on compilers

# Detour: Compiler Intro



- ❖ Parse high-level source code
- ❖ Convert to intermediate form (often SSA)
  - ❖ Convert all variables into infinite, logical registers
- ❖ Optimize! Optimize! Optimize! (heavy thinking here)
- ❖ Map logical registers onto architectural registers
  - ❖ A.k.a. register assignment
- ❖ Emit machine code

# Example (high-level lang)



```
x = 0;
```

```
y = x + 1;
```

```
// x = x * y
```

```
asm ("imul %eax, %ebx": "=a"(x) : "a"(x), "b"(y));
```

```
y = y + x;
```

# Example

## (Convert to pseudo-SSA)

```
x_0 = 0;
```

```
y_0 = x_0 + 1;
```

```
// x = x * y
```

```
asm ("imul %eax, %ebx": "=a"(x_1) : "a"(x_0), "b"(y_0));
```

```
y_1 = y_0 + x_1;
```

Assembly treated as  
black box, except  
input/output params

Every assignment  
treated like a new  
variable

# Example (Assign Registers)

x\_0 = 0;

%edx= 0;

y\_0 = x\_0 + 1;

%ecx = %edx + 1;

// x = x \* y

%eax = %edx; //  
“a”(x\_0),

asm (“imul %eax, %ebx”:

%ebx = %ecx // “b”(y\_0)

“=a”(x\_1) :

“imul %eax, %ebx”

“a”(x\_0), “b”(y\_0));

y\_1 = y\_0 + x\_1

%edx = %ecx + %eax;

Reuse edx. No  
longer live

“=a”(x\_1)

# Key points



- ❖ Compiler treats your assembly code mostly as a black box
- ❖ You specify what input variables should be in which registers
  - ❖ Compiler adds code to move variables around as needed
- ❖ You specify what output variables are in which registers
  - ❖ Compiler factors this into register assignment after the assembly
- ❖ Note that parameters are copy-by-value
  - ❖ In the previous example, if you don't specify an output back to x, the output will be ignored
  - ❖ Treated as x\_1 vs. x\_0

# For completeness



- ❖ Compilers are really smart. Seriously.
- ❖ In reality, a register assignment phase would probably work backwards from input constraints on inline assembly
  - ❖ I didn't do this in the previous slide for the purposes of illustration
  - ❖ Not always possible to avoid moving registers around or saving values before inline assembly

# Example (More Sophisticated)

```
x_0 = 0;
```

```
%eax= 0; // “a”(x_0),
```

```
y_0 = x_0 + 1;
```

```
%ebx = %eax + 1;  
// “b”(y_0)
```

```
// x = x * y
```

```
asm (“imul %eax, %ebx”:
```

```
“imul %eax, %ebx”
```

```
“=a”(x_1) :
```

```
%ecx = %ebx + %eax;
```

```
“a”(x_0), “b”(y_0));
```

```
y_1 = y_0 + x_1;
```

# Inlined Assembly

... // c code

```
asm ("assembly code" \
      output registers : \
      input registers : \
      clobbered registers );
```

Think of this as a separate function; inputs/outputs must be explicit

What is a clobbered register?

# A Concrete Example

```
asm volatile ("movl %0, %%edx\r\n" \
             "movl %1, %%ecx\r\n" \
             "movl %2, %%ebx\r\n" \
             "movl %3, %%eax\r\n" \
             "xchg %%bx, %%bx \r\n" \
             : /*no output*/ \
             : "g"(addr), "g"(name), \
               "g"(len), "g"(105) \
             : "eax", "ebx", "ecx", "edx");
```

%0 – not a real register; compiler will slot in

g = Let the compiler assign the register


These registers will be trashed (but not input/output)

# Clobbered Registers



- ❖ Suppose %edx is not an input or output parameter to your inline assembly
- ❖ The compiler may store some unrelated variable in this registers **before** your assembly, and then try to use it **after** the assembly
- ❖ Clobber registers tell the compiler to save this value (e.g., by pushing it on the stack), and restore it later if needed
  - ❖ Compiler does sophisticated liveness analysis to figure out whether this is necessary

# A More Efficient Version



```
asm volatile (xchg %%bx, %%bx " \
    : /*no output*/ \
    : "d"(addr), "c"(name), \
    "b"(len), "a"(105) );
```

- ❖ Notice:
  - ❖ Clobber registers only needed if not in input/output
  - ❖ If we want arguments in specific registers, no need to move them/waste time bouncing between registers
  - ❖ If you don't care, good to give the compiler some options